


MBR-18

Technical Manual

rel 1.1_2

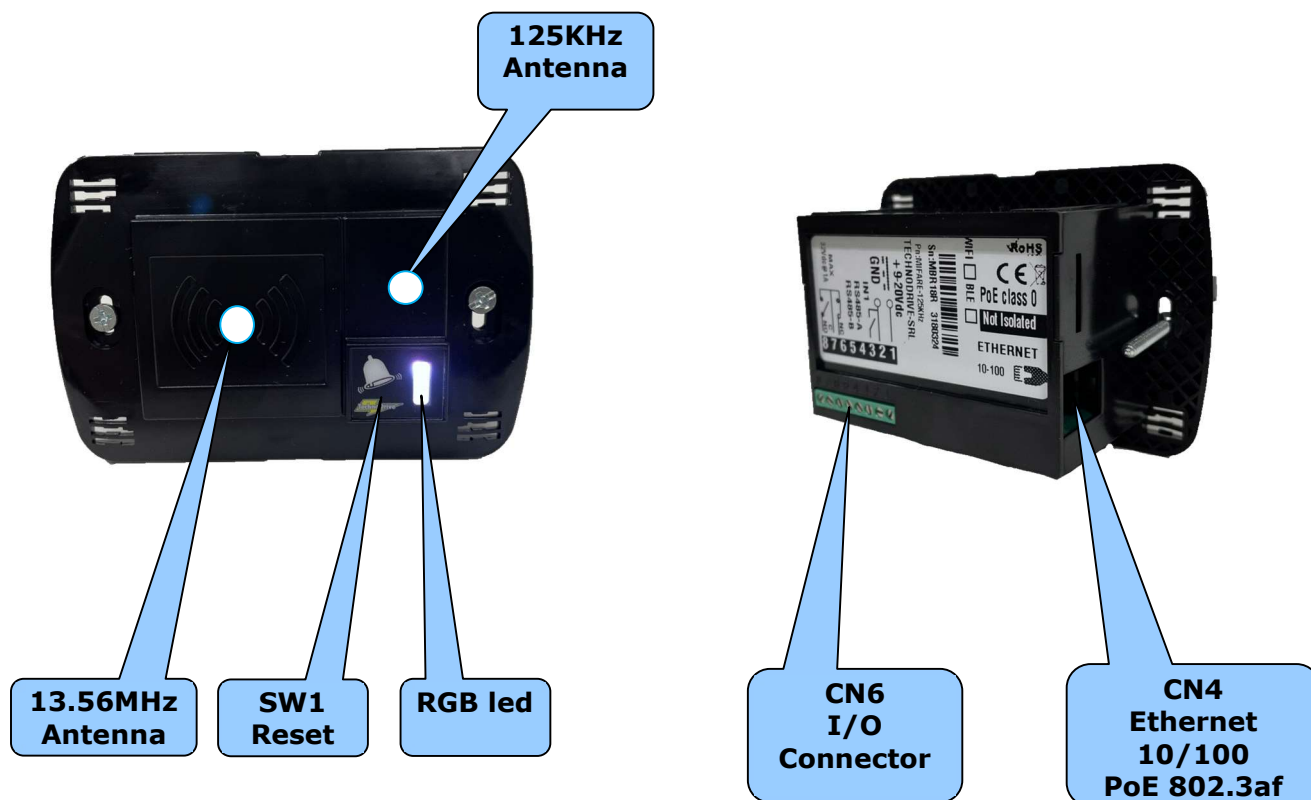

CN4:

Ethernet 10/100 connector, Auto-MDIX, **NOT ISOLATED** PoE IEEE 802.3af
 RED led Power supply ON
 GREEN led Link

CN6:

pin-1	+Supply (9..20Vdc) without PoE
pin-2	GND
pin-3	INPUT_1 (close to GND to activate)
pin-4	RS-485_ "A" (COM4 RS-485)
pin-5	RS-485_ "B" (COM4 RS-485)
pin-6	RELAY_1 NC (MAX 1A@32Vdc)
pin-7	RELAY_1 C (MAX 1A@32Vdc)
pin-8	RELAY_1 NO (MAX 1A@32Vdc)



Progettazione e Realizzazione Apparecchiature Elettroniche

RGB Led:

Power on:

1. Power ON "WHITE"
2. u-boot start "RED" > "GREEN" > "BLUE"
3. kernel start "YELLOW"
4. program start "WHITE"
5. ethernet cable **connected** = "BLUE FLASH", cable **disconnected** = "WHITE FLASH"

SW1:

RESET mode:

1. Power ON MBR-18
2. Press ~30 sec., when the LED becomes OFF, release switch
3. MBR-18 restart

RECOVERY mode:

1. Power ON MBR-18
2. Connect ethernet cable
3. Press ~40 sec., when the LED becomes RED, release switch
4. Wait ~30 sec. and wait 5 sec. BEEP, recovery mode active
5. Wait for the RED led to flash quickly
6. ***ip=192.168.0.1 TCPport=4660 WEBport=80 ID=01***

Technical characteristics:

- *CPU* Microprocessor Cortex-A7 800MHz
- *RAM* 512Mbyte DDR3 533MHz
- *FLASH* 256Mbyte SLC FLASH
- *RTC* High precision
- *SERIAL PORTS* 1xRS-485
- *USB* 2xUSB 2.0 HOST (Internal)
- *ETHERNET* 1xETHERNET 10/100 with **NOT ISOLATED** PoE IEEE 802.3af
- *OUTPUTS* 1xRELAY 1A@32Vdc MAX (NO, C NC)
- *INPUTS* 1xINPUT NPN
- *RF-READER* 1x125KHz , 1x13.56MHz
- *LED* RGB led
- *SOUND* Monotone Buzzer
- *KEYBOARD* 1 capacitive key
- *SUPPLY* 9..20Vdc max
- *POWER* 10W max
- *DIMENSIONS* (W x H x D) mm 106 x 71 x 56 (built-in box 503 compatible)
- *COVER* compatible 'LIVINLIGHT'
- *WEIGHT* 100g

TECHNODRIVE Srl -Via E.Ferrari, 7 20010 Arluno (MI) Tel. 02/903.77.887

Sede Legale : Via E.Ferrari, 7 20010 Arluno (MI)

Cod.Fisc. e P IVA 13384950153 R.E.A. n. 1645258 Capitale Sociale 10.000 Euro int. vers.